

Aug 6th, 9:00 AM - 12:00 PM

Influence of NaBH₄ reduction on the hydrogen storage properties of aniline/Pd composite materials

Whitney Shofner
University of Nevada Las Vegas

David W. Hatchett
University of Nevada, Las Vegas, david.hatchett@unlv.edu

Follow this and additional works at: https://digitalscholarship.unlv.edu/cs_urop

 Part of the [Chemistry Commons](#)

Repository Citation

Shofner, Whitney and Hatchett, David W., "Influence of NaBH₄ reduction on the hydrogen storage properties of aniline/Pd composite materials" (2008). *Undergraduate Research Opportunities Program (UROP)*. 15.

https://digitalscholarship.unlv.edu/cs_urop/2008/aug6/15

This Event is protected by copyright and/or related rights. It has been brought to you by Digital Scholarship@UNLV with permission from the rights-holder(s). You are free to use this Event in any way that is permitted by the copyright and related rights legislation that applies to your use. For other uses you need to obtain permission from the rights-holder(s) directly, unless additional rights are indicated by a Creative Commons license in the record and/or on the work itself.

This Event has been accepted for inclusion in Undergraduate Research Opportunities Program (UROP) by an authorized administrator of Digital Scholarship@UNLV. For more information, please contact digitalscholarship@unlv.edu.

Whitney Shofner
Mentor - David Hatchett

The characterization and chemical synthesis of composites containing aniline and N-Phenylenediamine (NPPD), synthesized with palladium, will be analyzed according to recent studies [1] to confer hydrogen storage capabilities. The palladium metal will be introduced as either PdCl_4^{2-} or PdCl_2^{2-} . The experiments will be carried out under both acidic and non-acidic conditions forming a total of 8 different compounds. Each compound will be reduced with NaBH_4 and analyzed using gas chromatography to measure hydrogen storage. Infrared spectroscopy and ultraviolet visible spectroscopy will also be used to gather data concerning each compound.

Influence of NaBH_4 Reduction on the Hydrogen Storage Properties of Aniline/Pd Composite Materials

Whitney Shofner and Dr. David W. Hatchett
Department of Chemistry
University of Nevada, Las Vegas








Abstract

The chemical synthesis and characterization of composites containing aniline and N-Phenylenediamine (NPPD) is examined [1]. The synthesis is achieved using palladium anions without additional oxidant. The palladium anions utilized in the synthesis were PdCl_4^{2-} and PdCl_2^{2-} . The influence of acid on the materials produced in the synthesis were examined. A total of eight different compounds were produced and evaluated for their hydrogen storage properties. In addition, each compound was further reduced with NaBH_4 and analyzed again using gas chromatography to measure the hydrogen storage properties after treatment. The goal is to produce materials that can reversibly sorb hydrogen for fuel applications.

Introduction

The use of conductive polymers in energy applications has increased recently due to the unique properties of the materials. The polymers behave like metals while retaining the properties of polymer materials improving processing and use in more novel applications. For example, conductive polymers have been used in the development of hand prosthetics [2], earthworm-like robots [3], and in antifouling/antistatic films. Polyaniline is one of the most environmentally stable polymers and is easily processed through chemical or electrochemical methods. It has been used for energy applications including fuel cells and batteries. More recent studies [1] have examined the hydrogen sorption properties of the pristine polymer with mixed results. In one study the sorption of hydrogen was estimated at 6% by weight. In contrast, a second study found the polymer sorbed no hydrogen. The discrepancies associated with hydrogen storage of polyaniline are not well understood and may well be influenced by the method of preparation, any secondary treatment of the material, or experimental conditions such as pressure and temperature used during hydrogen storage [4] [5] [6]. Palladium has well known hydrogen storage properties through the formation of metal hydride bonds. Therefore, the incorporation of Pd into polyaniline should enhance the storage properties of the materials produced. The goal of this study was to produce composite materials with hydrogen storage properties using aniline or N-phenylenediamine reacted with either PdCl_4^{2-} or PdCl_2^{2-} in acidic and neutral solutions. In addition, the hydrogen sorption properties were measured using an in-house gas chromatograph equipped with a hydrogen generator. In the event that Pd was not fully reduced in the synthesis, the composite materials were further reacted with reducing agent NaBH_4 . The reduced samples were then compared to the untreated composite materials to determine the influence of Pd reduction on the hydrogen storage properties.

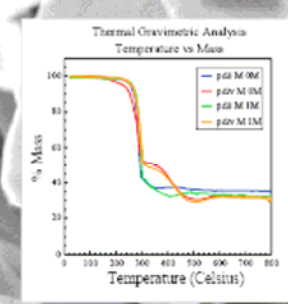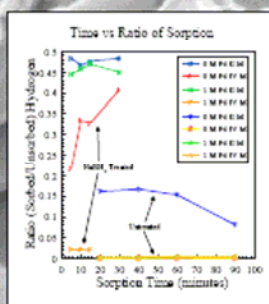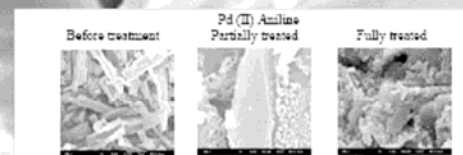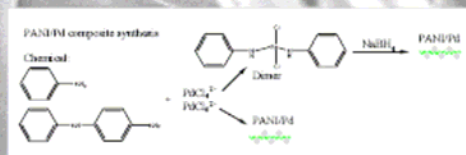

Conclusion

The data shows that complexes reduced with sodium borohydride store more hydrogen after treatment. No hydrogen sorption is observed for the unreduced Pd (II) samples. However, sorption of hydrogen is observed for the samples after they were treated with sodium borohydride. The differences in sorbed vs. unsorbed hydrogen peaks are represented as ratios for samples that were treated as well as those that were not treated. The Pd (II) aniline complexes with and without acid proved to be the most effective at hydrogen storage. The unreduced samples consist of Pd(II) aniline complexes showing little hydrogen sorption. The formation of Pd metal after reduction results in a significant enhancement of the hydrogen sorption properties.

Acknowledgements

I would like to thank Dr. Hatchett for giving me this opportunity and for all of his help along the way. Thank you to Asunga Ranasinghe for pushing me to apply for this grant, to John Kiyuanjui for always helping to answer my questions, to Janelle Dressler for assisting me with the GC, and thank you Jade Morgan for teaching me about all about polyaniline/Pd composites. I would like to give a very special thank you to Dr. Steinberg for teaching me everything I know about Gas Chromatography; I really enjoyed your keen sense of humor.

References

- [1] Morgan, J.L.; Millick, N.; Hatchett, D.W. Chemical Synthesis and Characterization of Aniline Based Composites and Complexes
- [2] Biddiss, E.; Chau, T. Electroactive polymeric sensors in hand prostheses: Bending response of an ionic polymer metal composite
- [3] Byungkyu, K.; Moon, G.I.; Young, P.L.; Youngin, K.; GeunHo, L. An earthworm-like micro robot using shape memory alloy actuator
- [4] S.J. Choe et al. ACS Fuel Chemistry Division Preprints, 2002, 47(2), 790. 6 wt% hydrogen uptake (93 MPa, 25 °C), 50% release at 25 °C, 50% at 175 °C.
- [5] B. Pamela et al. Synthetic Metals, 2005, 151, 208. 0 wt% hydrogen uptake (93 MPa, 25 °C).
- [6] H. Lee et al. Physical Review Letters, 2006, 97, 1. 7.6 wt% hydrogen uptake in polyacetylene, 4.9 wt% polypyrrole, and 4.1 in polyaniline. Polymers "decorated" with Ti metal.

